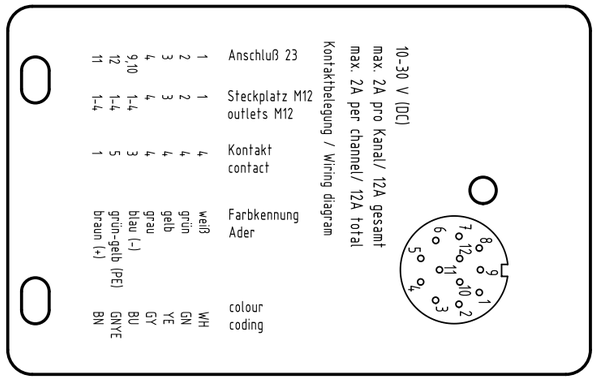

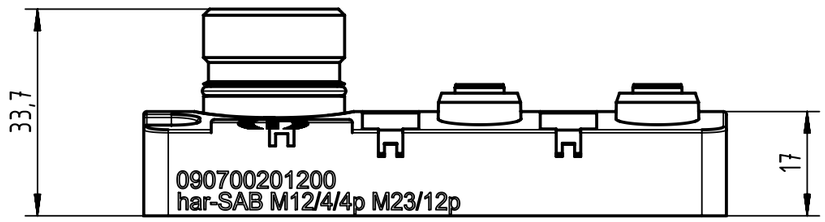

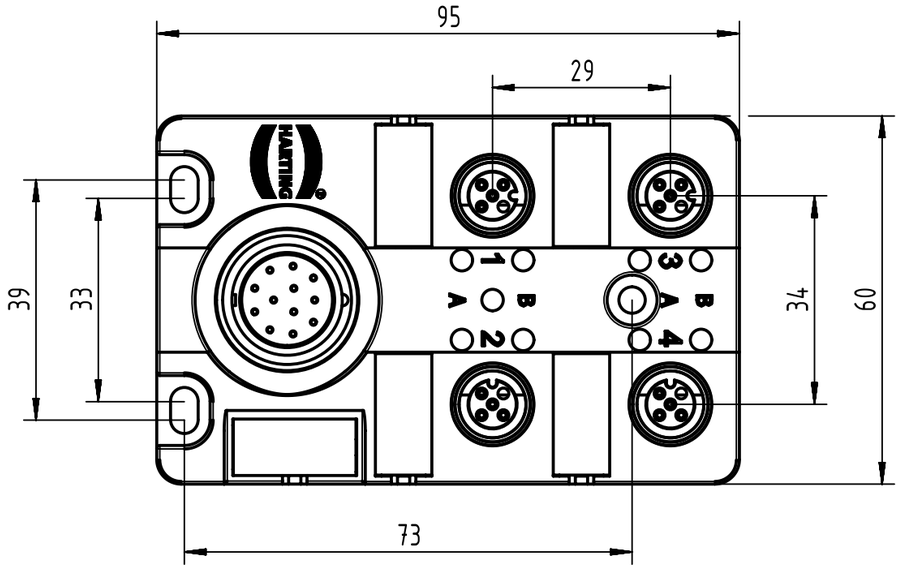

Loading plan

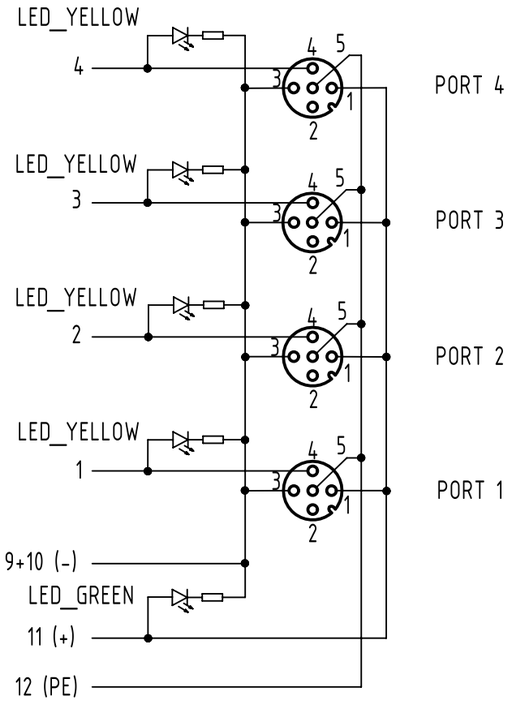

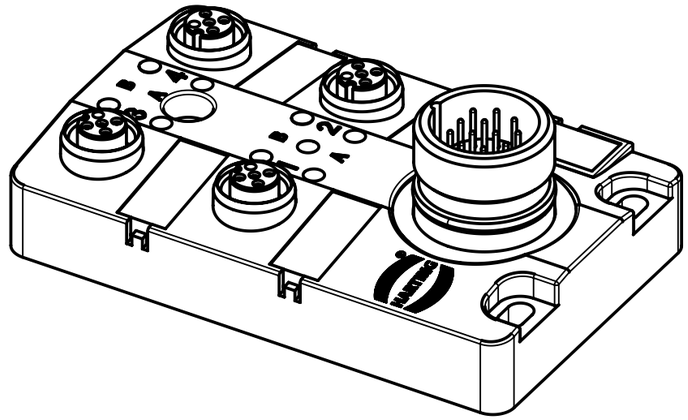

Electrical data:
-Rated voltage: 10-30V DC
-Nominal: 2 A per Contact
-Current: 4 A per Outlet
12 A max total

- Protection level: IP 68
- Temperature range: -20°C...+80°C

All Dimensions in mm	Tech. Character.	Free size tol.		According to production drawing

All rights reserved

Created by	Inspected by	Standardisation	Date	State
MUNTEANV	POPESCUD	AVRAM	2017-04-24	Final Release

Department HCS - RO

HARTING Customised Solutions
D-32427 Minden

Title: har-SAB M12/4/4p M23/12p

Doc-Key / ECM-Nr.: 100689588/UGD/000/B 500000118440

Type	Number	Rev.	Page
TB	090700201200	B	1/1

A3